

Datasheet


Type **AFS12**

Technical data

Supply voltage: 24V AC/DC $\pm 20\%$
 Power: Approx. 0.6VA (15mA to 30mA)
 Relay circuit: Max. 50mA / 30V AC/DC / 0.45W
 Insulation voltage: 750V AC 1min.
 Operating temperature: -25°C to 70°C
 Operating pressure: -0.5 bar to 7 bar
 Self monitoring: Yes
 Mounting connection: G1"
 Mounting length: According to customer spec.
 Material wet side: 1.4435, Duran-Glass
 Integrated self monitoring control system



Options Mounting connection G 3/4", 1.4435
 Mounting connection G 1 1/2", 1.4435
 Connector box, aluminium with clamps and PG
 Connector box, aluminium with Bendix connection

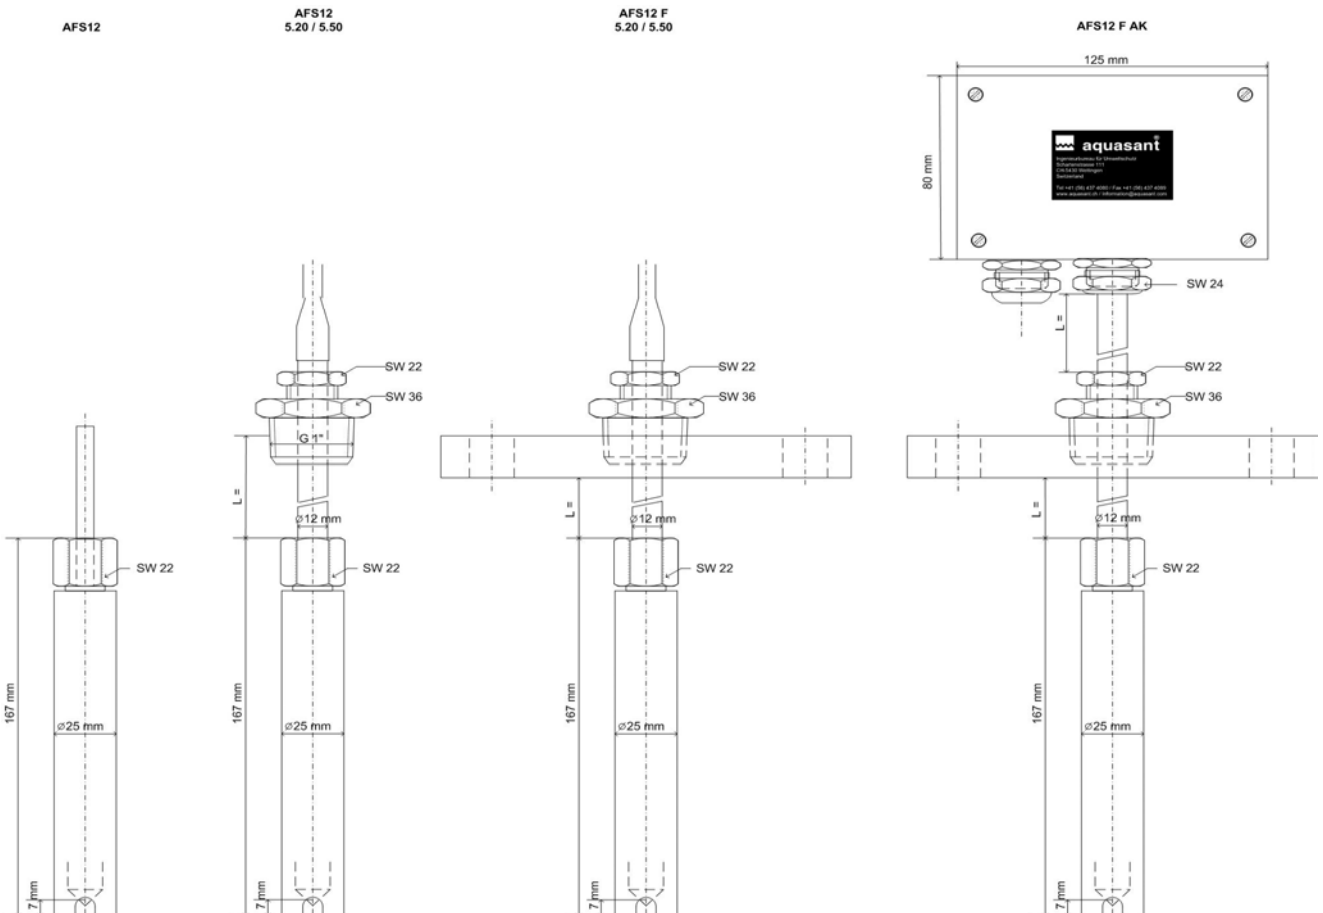

Types	Article no	Execution
AFS12	100701	5m cable
AFS12 5.20		5m cable 1.4435 distance sleeve 200mm length Special length acc. to spec. Mounting connection G1", 1.4435
AFS12 5.50		5m cable 1.4435 distance sleeve 500mm length Special length acc. to spec. Mounting connection G1", 1.4435
AFS12 F 5.20		1.4435 distance sleeve 200mm length Special length acc. to spec. Flange, Standard DIN 2501 or ANSI B 16.5
AFS12 F 5.50		1.4435 distance sleeve 500mm length Special length acc. to spec. Flange, Standard DIN 2501 or ANSI B 16.5
AFS12 F AK 20		1.4435 distance sleeve 200mm length Special length acc. to spec. Flange, Standard DIN 2501 or ANSI B 16.5 Connector box, aluminium
AFS12 F AK 50		1.4435 distance sleeve 500mm length Special length acc. to spec. Flange, Standard DIN 2501 or ANSI B 16.5 Connector box, aluminium